

PANTHER LI & LE

COMPLETE HIGH PERFORMANCE MICROSTEPPING SYSTEM

Servo Systems Co.
115 Main Road, P.O. Box 97
Montville, NJ 07045-0097
Toll Free: (800) 922-1103
Phone: (973) 335-1007
Fax: (973) 335-1661
www.servosystems.com

FEATURES

- Integral Indexer, Driver, Power Supply and Encoder Feedback
- Extremely Compact (2.6 x 3.9 x 4.4 inches) (68 x 101 x 112 mm)
- Low Cost
- Short Circuit and Over Temperature Protection
- Built-in Line Filter
- Fault and Power Indicators
- High Output Current (3 Amps RMS, 4 Amps Peak)
- Advanced Surface Mount and ASIC Technology
- 115/240 VAC, 50/60 Hz Versions
- Optional Rack Mounting
- Fixed or Variable Step Resolution
- 1/100 Step Command Resolution
- 1/256 Step Motor Resolution
- Programmable Accel and Decel Ramps
- RS422 Party Line Operation (Optional RS232 Communication)
- 2k Bytes of Nonvolatile Memory for Program Storage
- 6 Buffered User I/O Ports
- Optically Isolated Home and Limit Switch Inputs
- Jog Inputs
- Go and Soft Stop Inputs
- Programmable Motor Run and Hold Currents
- Motor Speeds to 6,000 RPM
- Programmable Trip Points



DESCRIPTION

Incorporated into the PANTHER LI & LE drivers are proprietary circuits that minimize ripple current while maintaining a 20 kHz chopping rate. This prevents additional motor heating that is common with drivers requiring higher chopping rates. Now low inductance step motors can be used to improve high speed performance and system efficiency.


PANTHER LI & LE built-in indexers allow the user, via a serial link, to program parameters such as acceleration/deceleration ramps, velocity, position, resolution, drive

current, etc., to form simple or complex motions.

Programs can be executed by sending single commands, or can be stored in the on-board non-volatile memory which can then be executed on power-up or by discrete user inputs.

The indexer has a variety of built-in functions. Some of which include limit switches and a homing algorithm, as well as general purpose inputs and outputs that can be used to detect switch closures and to activate solenoids and other external devices.

The PANTHER LE, with its built-in encoder option, can be used to enhance system performance by adding complex functions such as position verification, maintenance and stall detection. These functions can be of particular importance with systems requiring closed loop control to track movement and final position.

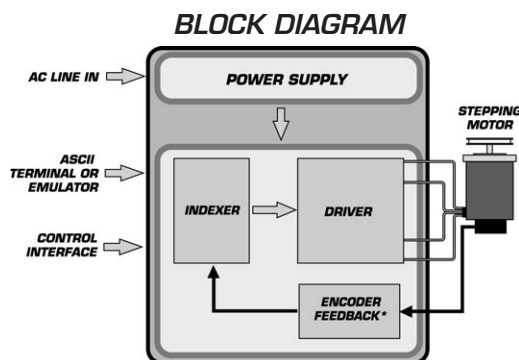

* Available on LE & HE Versions Only

ELECTRICAL SPECIFICATIONS

Input Voltage	90 to 128 VAC or optional 180 to 264 VAC, 50/60 Hz
Drive Current Per Phase—Software Selectable.....	0.4 to 4 Amps Peak (Max 3 Amps RMS)
Isolated Logic Inputs.....	Limit A, Limit B, Home, Party
Baud Rate.....	9600
Velocity Generator Range	20 to 20,000 steps/second
Motor Resolutions – 1.8°/Full Step.....	Auto-Variable, 200, 400, 800, 1600, 3200, 6400, 12800, 25600, 51200
Position Counter	±8,388,607.99
Nonvolatile Memory.....	2k Bytes
Inputs – General Purpose	3 (0 to +5 VDC)
Inputs – Dedicated Inputs [Go, Jog +, Jog –, Jog Speed, Soft Stop].....	5 (0 to +15 VDC)
Outputs – General Purpose	3 (0 to +5 VDC)
Encoder Resolution.....	50 – 12750 (Lines in 50 Line Increments)
Protection.....	Thermal, Ø to Ø, Ø to Ground, and Ø to +V _{BUS} Short Circuit
Status Indicators (LEDs)	Power, Fault

PIN ASSIGNMENTS

CONNECTOR P1		CONNECTOR P3	
PIN	FUNCTION	PIN	FUNCTION
1	Phase A	1	Input 3
2	Phase /A	2	Input 2
3	Phase B	3	Input 1
4	Phase /B	4	+5VDC Output
5	AC Neutral	5	Output 3
6	AC Input Line	6	Output 2
CONNECTOR P2		7	Output 1
PIN	FUNCTION	8	Moving
1	TX –	9	Jog +
2	TX +	10	Jog –
3	RX –	11	Index –
4	RX +	12	Index
5	Limit A	13	Channel A/
6	Party	14	Channel A
7	Limit B	15	Channel B/
8	Home	16	Channel B
9	Opto Supply	CONNECTOR P4	
10	Fault	PIN	FUNCTION
11	Ground	2	Transmit Data
12	Go	3	Receive Data
13	Soft Stop	5	Ground
		6	+5VDC

Pins not shown are No Connect.
Refer to product manual for complete pin assignment details.

TEMPERATURE

Storage.....	–40 to +125° C
Case.....	0 to +60° C

ORDER INFORMATION

Name	Part Number
Microstepping System	Panther LI/LE
Built-in RS232 to RS422/485 Converter....	Panther LI2/LE2
Rack Mounting Option.....	add –RM to basic part #
Differential Encoder Option.....	add –DE to basic part #
240 VAC Input Voltage	add –240 to basic part #
Inline RS232 to RS422 Converter.....	CV-3222
Graphic User Interface Indexer Software	QuickSTART 1
Small End Screwdriver	SD–1

MECHANICAL

Dimensions in Inches (mm)

