


SERVO SYSTEMS CO.

Low Profile Series Linear Stages - Accessories

Model: MLPS-xLS

Description: Dual position limit / home sensors

Dimensions:

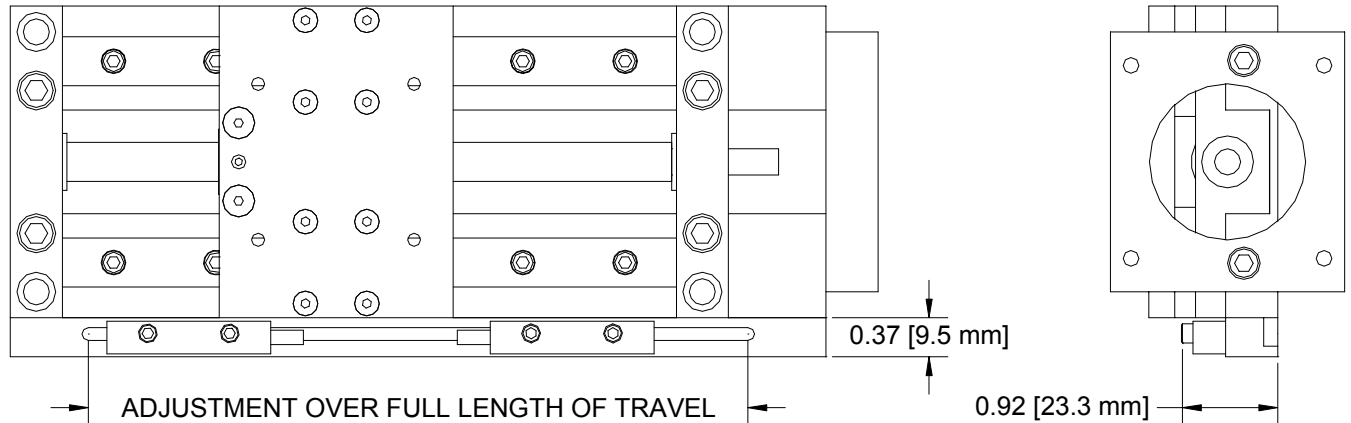

Specifications:

Power Consumption	<0.29W
Max. Switching Current	200 mA
Voltage Drop	<1.8V
Max. Switching Frequency	2 kHz
Output Indicator	Red LED
Protection Class	IP67 (sensor only)
Connection	2 Meter Cable with Flying Leads on Each Sensor
Wire Function	Brown: Supply Voltage (6-30VDC) Blue: Signal Ground Black: Signal

Note: When placing your order, please specify PNP or NPN, and Normally Open or Normally Closed. These sensors are short circuit protected, but are not protected against polarity reversal.

Price: Contact Servo Systems Co. via phone or e-mail for pricing information.

Servo Systems Co. can configure any of our **Low Profile Series** stages in X-Y and X-Y-Z configurations. In addition, we can complete this linear system with any step motor, servo motor, or SmartMotor™ that is needed for your application.

