


VERSION “L” (Long trolley)

“L”-versions have a longer trolley mounted on two internal sliders instead of one. The load and moment capacities obtainable, particularly the M_y and M_z , are much higher than those of the base versions. For the M_y and M_z moment capacities which refer to a specific trolley length please refer to page B23.


A40L

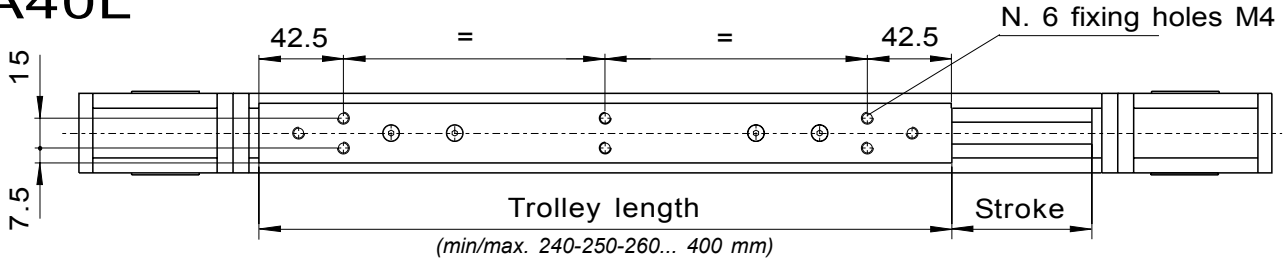

Type	C_{0rad} [N]	C_{0ax} [N]	M_x [Nm]	M_y [Nm]	M_z [Nm]	Max stroke with max trolley length [mm] *
A40L	1640	600	5.6	from 22 to 70	from 61 to 192	1660

* The values refer to the maximum length of a non joined rail. For longer strokes see note on page B36.

A55L, C55L, E55L

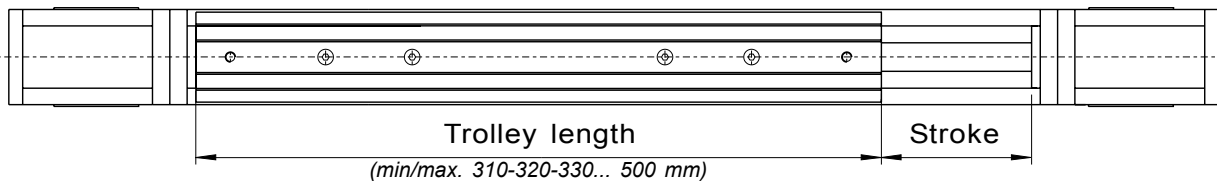


Type	C_{0rad} [N]	C_{0ax} [N]	M_x [Nm]	M_y [Nm]	M_z [Nm]	Max stroke with max trolley length [mm] **
A55L	4350	1500	23	from 82 to 225	from 240 to 652	2770
C55L	600	3280	37	from 213 to 525	from 39 to 96	1550
E55L*	4350	3000	51	from 165 to 450	from 239 to 652	2770

* Only length 310 mm is considered standard, longer trolleys are considered special products.

** The values refer to the maximum length of a non joined rail. For longer strokes see note on page B36.

A75L, C75L, E75L, ED75L*

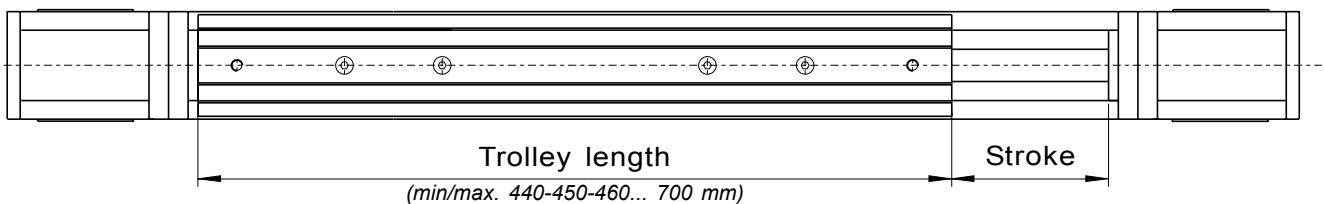

Type	C_{0rad} [N]	C_{0ax} [N]	M_x [Nm]	M_y [Nm]	M_z [Nm]	Max stroke with max trolley length [mm] **
A75L	11000	3710	87.2	from 287 to 770	from 852 to 2282	3000
C75L	1500	8700	170.4	from 674 to 1805	from 116 to 311	2610
E75L*	11000	7420	171	from 575 to 1540	from 852 to 2282	3000
ED75L*	11000	8700	400.2	from 1174 to 2305	from 852 to 2282	2500

* Only length 440 mm is considered standard, longer trolleys are considered special products.

** The values refer to the maximum length of a non joined rail. For longer strokes see note on page B36.

Order code:

